


There are
some things
in life
you can always
rely on.

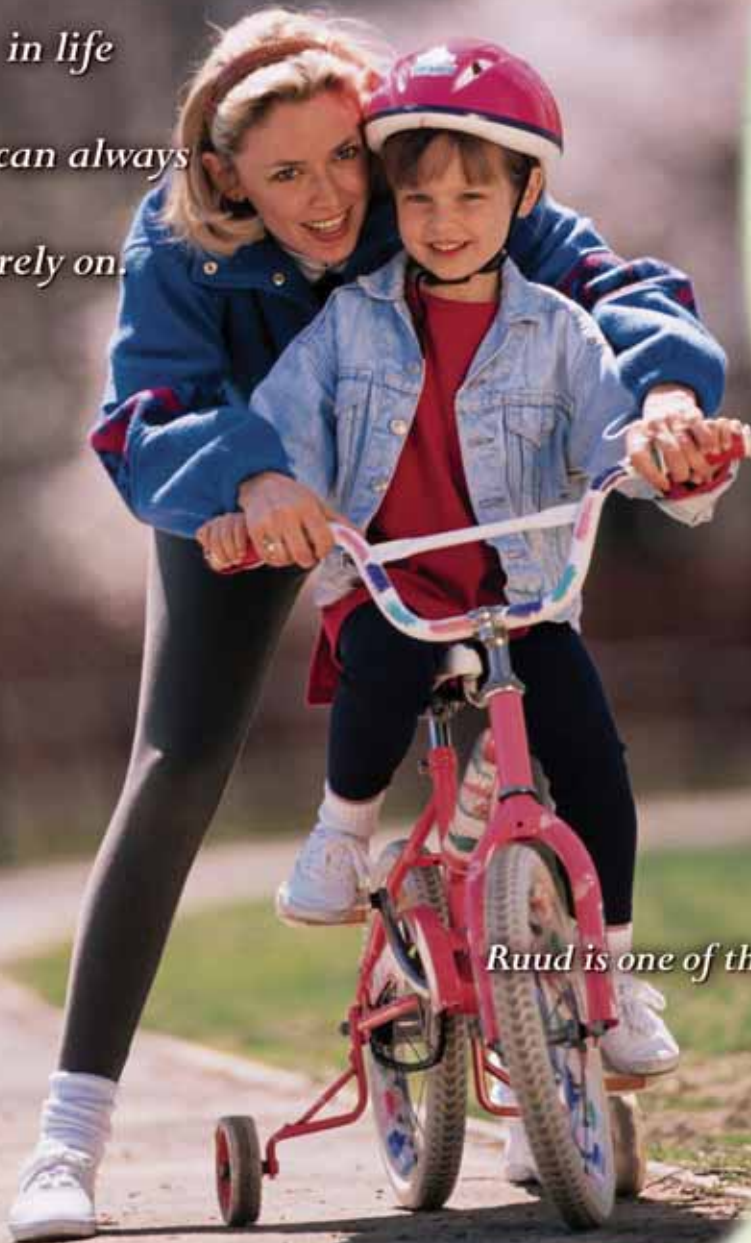

Ruud is one of them.

Ruud

Model RHSL

featuring Industry Standard
R-410A Refrigerant




- Multiposition, compact design minimizes space required in new construction and retrofit applications
- Broad range of airflow capacities from 18,000 to 60,000 BTU/H
- A 10-Year conditional warranty on all parts



Quality That Endures

Ruud Air Handlers combine money-saving efficiency, quiet operation, and legendary reliability to bring you total peace of mind in home comfort – year after year. Some Air Handlers cost more, some promise more – but nothing performs more reliably. It's that simple.

Rely On
RUUDTM

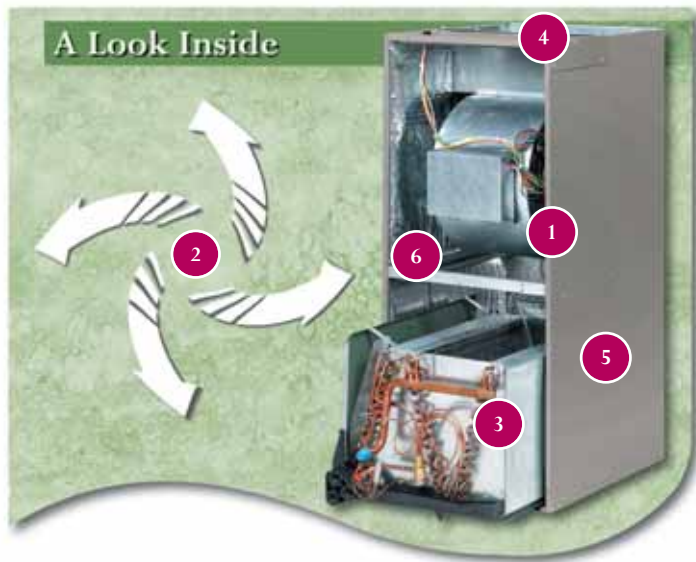

A Look Inside

Features & Benefits:

- 1. Lower Energy Costs.** The heart of your Air Handler is the blower motor. This Ruud air handler features a PSC blower motor for improved performance and durability.
- 2. Flexible Installation Options.** The versatile four-way design of the Ruud Air Handler (upflow, downflow, horizontal left and horizontal right applications) allows our unit to fit in with the design of your home.
- 3. Efficient Cooling.** The high-efficiency indoor cooling “N-Coil” provides lower airflow resistance which results in high performance in an extremely compact size.
- 4. Optional Electric Heat.** Field-installed auxiliary heater kit includes circuit breakers that also meet UL and cUL requirements as a service disconnect switch.
- 5. Durable Cabinet.** Our sturdy steel cabinet protects your Ruud unit from accidental bumps and bruises.
- 6. Serviceability.** Service time and expense are kept to an absolute minimum. In addition to having one of the smallest overall profiles in the industry, your Ruud Air Handler has been engineered to provide your contractor easy access to all internal components.



Ruud

Model RHSL
featuring Industry Standard
R-410A Refrigerant

There are some
things in life
you can always
rely on...



Limited Warranty Information

Ruud supports its equipment with strong warranties and reliable, professional service. That's why Ruud backs the RHSL Air Handlers with a ten-year conditional parts warranty (Registration Required).



Protection You Can Count On

While your Ruud equipment is incredibly reliable and covered by an outstanding warranty, you can extend your warranty coverage with Protection Plus® extended service protection. Then you can relax and enjoy the comfort of your Ruud home comfort system – without worrying about the cost of parts or labor for unexpected repairs. And when Protection Plus is purchased in conjunction with your contractor's maintenance program, you can enjoy the peace of mind that your equipment will be both maintained and repaired – as needed and without additional expense.



Ask your contractor about the variety of Protection Plus plans now available. For more information, call 1-877-276-4294 or visit www.protectionplusonline.com.

KwikComfort Financing

Ask your Ruud contractor about KwikComfort® Financing, the easy and convenient way to finance everything associated with your Ruud equipment – your original equipment, all subsequent service, Protection Plus® extended service protection, and even the comfort options you might choose to add later.




Ruud Heating, Cooling, & Water Heating
P.O. Box 17010 • Fort Smith, AR 72917
www.Ruud.com

Ruud manufactures residential & commercial heating, cooling, & water heating products.

"In keeping with its policy of continuous progress & product improvement, Ruud reserves the right to make changes without notice."

Printed in the U.S.A. 5/12 QG Form No. M22-4008-GRAY Rev. 7

RUUD SALES FACT SHEET

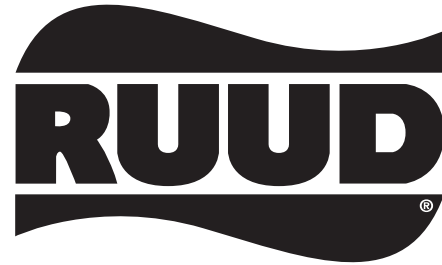

Features

- 1 1/2 ton [5.3 kW] through 5 ton [17.6 kW] models are between 42 1/2 to 55 1/2 inches [1080 to 1410 mm] tall and 22 inches [559 mm] deep.
- Versatile 4-way convertible design for upflow, downflow, horizontal left and horizontal right applications.
- Factory-installed high efficiency indoor coil.
- All models meet or exceed 330 to 400 CFM [156 to 189 L/s] per ton at .3 inches [.7 kPa] of external static pressure.
- Enhanced airflow up to .7" external static pressure.
- Sturdy construction with 1.0 inch [.24 kPa] of reinforced foil faced jacket insulation for excellent thermal and sound insulation.
- Field-installed auxiliary electric heater kits provide exact heat for indoor comfort. Kits include circuit breakers which meet UL and cUL requirements for service disconnect.

AIR HANDLERS

RHSA- Standard Efficiency
featuring R-22 Refrigerant

RHSL- Standard Efficiency
featuring New Industry Standard
R-410A Refrigerant

GENERAL TERMS OF LIMITED WARRANTY

Ruud will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

Conditional Parts* (Registration Required) Ten (10) Years
*Refer to Product Warranty Card for details.

<u>R</u>	<u>H</u>	<u>S</u>	<u>A</u>	<u>—</u>	<u>HM</u>	<u>24</u>	<u>17</u>	<u>J</u>	<u>A</u>	
RUUD	<u>CLASSIFICATION</u> H = AIR HANDLER	S = STANDARD MODEL (PSC MOTOR)	<u>REFRIGERANT</u> A = R-22 L = R-410A		A/C OR HP MULTI- POSITION (VERTICAL UPFLOW/ HORIZONTAL LEFT IS THE FACTORY CONFIGURATION)	<u>CAPACITY</u> 18 = 18,000 BTU/HR [5.27 kW] 24 = 24,000 BTU/HR [7.03 kW] 30 = 30,000 BTU/HR [8.79 kW] 36 = 36,000 BTU/HR [10.55 kW] 42 = 42,000 BTU/HR [12.31 kW] 48 = 48,000 BTU/HR [14.06 kW] 60 = 60,000 BTU/HR [17.58 kW]	<u>CABINET SIZE</u> 17 = 17.5" [431.8 mm] (800-1200 CFM) 21 = 21" [533.4 mm] (1400-1600 CFM) 24 = 24.5" [609.6 mm] (1600-1800 CFM)	<u>VOLTAGE</u> A = 115/1/60 D = 480/3/60 J = 208/240/1/60	<u>DESIGN VARIATION</u> A = 1ST DESIGN	
							Price	Starting at: \$		

